

Unit Ref JL 20 x 8 -Drying

Our standard jackleg cabin range comes with a plastisol external wall finish, a vinyl faced plasterboard internal wall and ceiling finish, with all internal trims in pvc and vinyl floor covering. This gives our cabins a low maintenance, durable and attractive finish, which is suitable for a variety of uses and industries.

This 20 x 8 jackleg drying room unit is ideal for use on civil, power generation, constructions or wind farm projects or for sporting bodies as a changing room, among many other uses.

Standard features include:

Floor

- Sealed vinyl flooring, on 15mm flooring grade plywood fixed to 125mm x 50mm pressure treated joists, with 25mm insulation between joists.

Wall

- Sandwich panel wall consisting of 0.5mm plastisol steel externally, 36mm Polystyrene insulation and 0.5mm plastisol steel internally.
- External corner cappings & trims are formed from 0.5mm plastisol steel with 40mm brown bevelled pvc skirting & architrave internally.
- Standard colours include Mushroom wall panels with Van Dyke Brown trims or Goosewing Grey wall panels with Merlin Grey trims. Other colours available on request.

Roof

- Ventilated roof, with marley-blanket covering, on 15mm exterior grade plywood on 125mm x 35mm roof bow joists with 100mm fibre glass insulation between the joists.
- Rainwater collection by extruded aluminum 'J' section gutter.

Windows

- Single glazed 450mm x 450mm in an aluminium frame with opening with a mesh grill externally.

Doors

- Exterior doors in solid timber with plastisol steel sheeting, hung in an aluminium frame, with a FD30 rating, with aluminium handles.

Electrical

- Fitted consumer unit for 'ready to go' connection, with double sockets, fluorescent strip lighting, with tubular heater underneath benching.

Lifting & Leveling


- Lifting eyes incorporated into four adjustable telescopic mild steel jacklegs to facilitate levelling and siting on uneven surfaces.

Optional Extras

If you have specific requirements for your cabin, simply contact us and our design office will accommodate your every requirement. Examples of extras include:






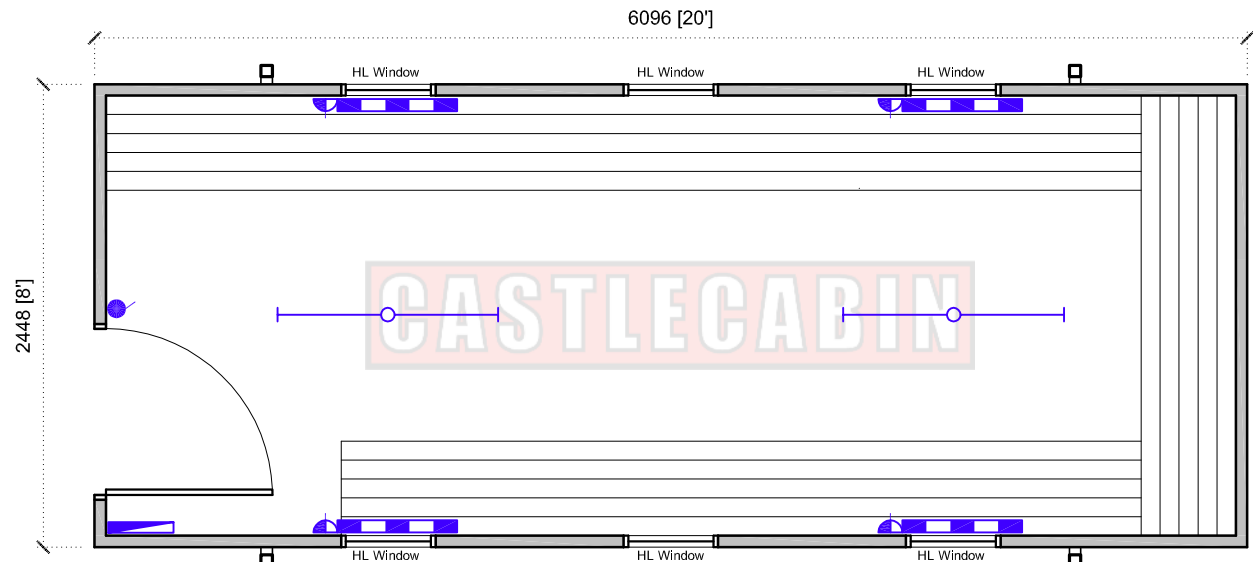















- Upgrade to uPVC double glazed windows.
- Upgrade to higher insulation u-values in your floor, wall or ceiling.
- Fit Polysafe, safety flooring throughout.

- Increase the standard building fire rating of 30 minutes to meet your specific requirements.



FLOOR PLAN
SCALE 1:40

LEGEND

-  Single Fluorescent Light
-  Twin Fluorescent Light
-  Bulkhead Light
-  Light switch
-  Pull chord light switch
-  13A Twin socket
-  13A Single socket
-  Fan heater
-  Tubular heater
-  Convactor Heater
-  Storage Heater
-  Radfator
-  Consumer Unit
-  Hand Dryer
-  Water heater
-  100mm Extractor fan
-  Electric shower
-  Cooker Point
-  CATT II
-  HL
-  PIR Light Sensor switch

GENERAL NOTES

OUTLINE SPEC:

FLOOR:
Polystyrene insulation between pressure treated joists on flooring grade plywood finished with vinyl sheet flooring.

WALLS:
Plastisol steel wall panels in Mushroom with trims in Vandek Brown, or Goosewing Grey wall panels, with trims in Merlin Grey. Polystyrene insulation between framing with an internal vinyl faced plasterboard. Skirting in a brown pvc bevelled finish.

ROOF:
Marleydeck blanket bonded to WBP plywood on roof bow joists with fibreglass insulation between the joists. Ceiling finish in a white vinyl faced plasterboard.

JACKLEGS:
Four adjustable telescopic mild steel jacklegs to facilitate levelling.

DOORS:
Exterior doors are solid timber, FD30 rated, with plastisol steel sheeting in an aluminium frame.

WINDOWS:
Single glazed 1065 x 1065mm in an aluminium frame with a top sash opening.

HEATING:
Standard 2KW wall mounted convactor heaters with thermostats.

ELECTRICAL:
Units are pre-wired with fluorescent luminaries for lighting and 13amp sockets outlets. Wiring to R.E.C.I. standards.

CEILING HEIGHT:
2300MM (7.5FT)

PRODUCT CODE

JL 20x8 -Drying

TITLE

PLAN LAYOUT

SCALE 1:40

REV. 0

